


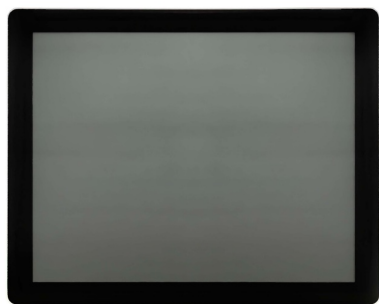

Specification

LCD Touch Panel

LCD Size	15" (4:3)
Brightness	250 nits or 400+ nits (Optional) or 1000+ nits (Optional)
Resolution	1024 x 768
Colors	16.7M
Viewing Angle	88/88 (H) , 85/85 (V)
Contrast Ratio	1000 : 1
LED Life Time	50,000 Hrs
Touch Screen	True-Flat PCAP Touch (IP67 Front) or Resistive Touch (Optional), Anti-UV, Anti-IR protection, Optical Bonding (Optional)
Surface Hardness	7H
Surface type	Non-reflective surface

External I/O Ports

Display Input	VGA + DP + HDMI or VGA + DVI
Display Control	OSD

Audio

Internal Speaker	2 x 5 Watts, internal stereo speaker (Optional)
------------------	---

Power

Power Supply	DC IN 12V or Universal 90-240V, 12V/50W Power adapter Support 9-36VDC-IN phoenix connector (Optional)
--------------	--

Environment

Ventilation	Fanless
Dust & Water Proof	Front IP67, Aluminum front bezel, True-Flat design
Operating Temperature	0°C ~ 60°C (32~140°F)
Storage Temperature	-20°C ~ 70°C (-4~176°F)
Humidity	10% ~ 95% R/H non-condensing

Dimensions (WxDxH)

358.3 x 281 x 48 mm, suggested cut out is 335 x 257 mm

Weight

2.2 kg

Mounting

VESA Mount 75 x 75 mm or 100 x 100 mm, or Panel Mount with Panel Mount bracket (Optional)

